




KEY FEATURES

- Certified Intrinsically Safe to:
 - ATEX
 - {Ex} I M 1 Ex ia I Ma (Ta = 0 to 45 C)
 - {Ex} II 1 G Ex ia IIC T6 Ga (Ta = 0 to 45 C)
 - CSA Class 1 Group A, B, C & D Division 1
- For use in Zone 0, Zone 1 hazardous areas
- Also approved for use in MINES
- No plant shutdown or hot work permit necessary
- Heavy duty sealed unit - IPX5 and IPX7 rated
- Rugged, durable, shock-proof construction
- Stable calibration - linear accuracy - no zero adjustment
- Self verification of the measurements to ensure accuracy
- Bright LED display with polarised filter
- Two rechargeable battery packs with charger
- Displays sound velocity settings
- Echo strength indicator to aid measurement
- Various probe options
- Right angle probe is available for use in areas of restricted access
- Probe frequency selectable
- Metric / imperial switchable
- Low battery warning.



BENEFITS OF MULTIPLE-ECHO

- Measures remaining metal thickness on corroded and coated structures
- All measurements are error checked using 3 return echoes to give repeatable, reliable results
- Accepted by all major classification societies
- Greatly reduces inspection time and costs
- Echo strength indicator to aid measurement.

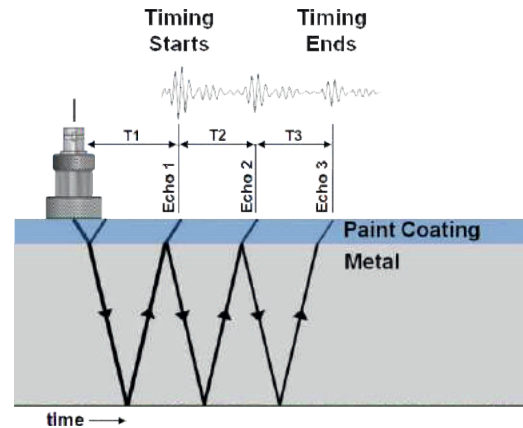

With Multiple-Echo, readings are taken by measuring the time delay between any three consecutive backwall echos. The time of T1 (coating thickness) is ignored. The times of T2 and T3 are equal to the time that it takes to travel through the metal. Only by looking at three echos can the measurements be automatically verified (where T2 = T3).

APPLICATIONS

Maintenance and safety checks of metal thickness for:

- Chemical plants
- Petroleum, chemical storage tanks
- Oil and gas production facilities such as pipelines and offshore platforms
- Dry, dusty environments where ignition could occur
- LPG vessels
- Road transport tankers carrying potentially explosive contents
- Grain processing plants
- Fuel depots
- Processing vessels
- Structures and facilities in mines
- ...plus many more.

Cygnus Instruments

Cygnus INTRINSICALLY SAFE Ultrasonic Thickness Gauge



SPECIFICATION

Materials	Sound velocities between 2000 and 7000 m/s (0.059 and 0.31 in/microsec) - covers virtually all common engineering materials
Measurement Range in Steel	3 mm - 250 mm (0.110" - 9.995") with 2.25 MHz probe 2 mm - 150 mm (0.065" - 6.000") with 3.5 MHz probe 1 mm - 50 mm (0.045" - 4.000") with 5.0 MHz probe
Accuracy	±0.1 mm (±0.004") or 0.1% of thickness measurement, whichever is greatest, when calibrated in accordance with Cygnus Instruments calibration procedure
Resolution	0.1 mm or 0.05 (selectable) (0.005" or 0.002")
Probes	Single crystal soft-faced compression 6 mm (¼") - 5 MHz 13 mm (½") - 2.25, 3.5 or 5 MHz 19 mm (¾") - 2.25 MHz (lower frequency probes offer better penetration on heavy corrosion/coatings)
Power	NiMH rechargeable battery pack
Battery Life	10 hours' continuous operation
Display	Large, bright LED display
Size	235 mm x 75 mm (9.252" x 3")
Weight	1040 g (34.7 oz) with remote probe (inc. batteries)
Operating Temp.	-10°C to +50°C (14°F to 122°F)
Certification	ATEX {Ex} I M 1 Ex ia I Ma (Ta = 0 to 45 C) {Ex} II 1 G Ex ia IIC T6 Ga (Ta = 0 to 45 C) CSA Class 1 Group A, B, C & D Division 1
Environmental Protection	IPX5 & IPX7
Compliance	CE, British Standard BS EN 15317:2013 (Group 1) (specification for the characterisation and verification of ultrasonic thickness measuring equipment)
Warranty	3 years on gauge and 6 months on probe

**Specifications are subject to change*

KIT CONTENTS

Instrument, heavy duty remote 2.25 MHz x 13 mm (½") diameter probe, nose cone tommy bar, probe locking ring key, 2 rechargeable batteries, battery charger, spare membranes, membrane couplant, O rings, steel test block, calibration jumper lead, calibration trim tool, hex key, ultrasonic couplant, operation manual and carry case.

